

MOUNTED SPRAYER



carrarospray®

Mounted sprayer



APUS 1 - 400/500/600 lt

CONVEYOR FRONTAL SUCTION
FOR SPINNING PLANTS FLAT AND SLOPING



APUS 4 - 400/500/600 lt

TAPERED CONVEYOR SUITABLE FOR ROWS
THAT DEVELOPS IN HEIGHT AND TO THE SLOPES



APUS 5 - 300/400/500/600 lt

CONVEYOR TAPERED WITH REAR SUCTION SHORT AND COMPACT
TO OPERATE IN SLOPE WITH LIMITED ROOM TO MANEUVER



APUS 6 - 500/600 lt

CONIC CONVEYOR WITH REAR SUCTION, SHORT
AND COMPACT TO OPERATE IN A SLOPE WITH LIMITED MANEUVERING SPACE

Mounted sprayer





ZEN MOUNTED - 300/400 lt
FAN GROUP IN CENTRAL AND RAISED POSITION.
TOWER FOR ESPALIER WITH A NARROW ROW SPACING




ARIEL - 200/300 lt
VERTICAL ANTI-DRIFT CONVEYOR FOR ESPALIER VINEYARDS IN SLOPE
WITH LIMITED AREA OF WORK



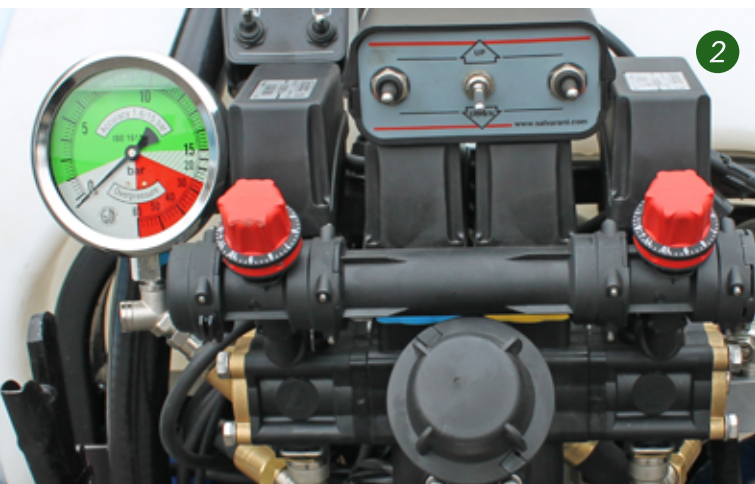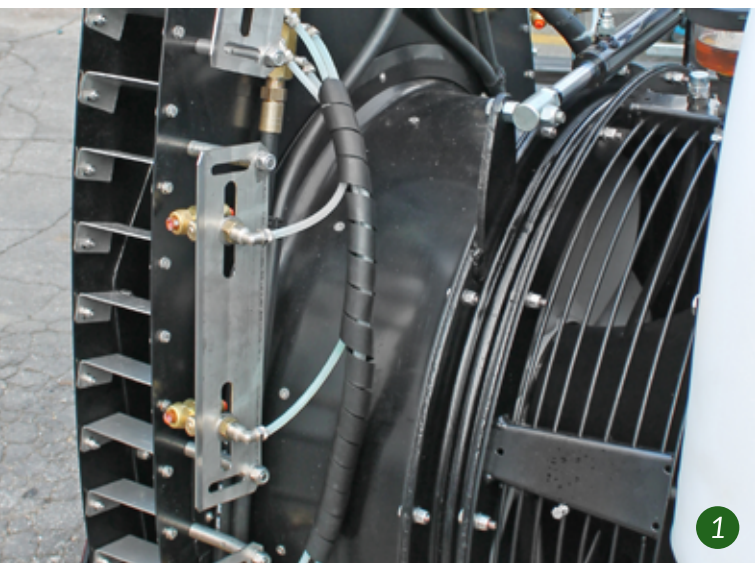

1. Movable nozzles mounted on the bypass position respect to the air stream to avoid the turbulence and to ensure optimal uniformity of distribution on the wall to be treated
2. Control unit with solenoid valve

3. Oil tank pump visible from distance
4. Control unit with solenoid valve 4 sections

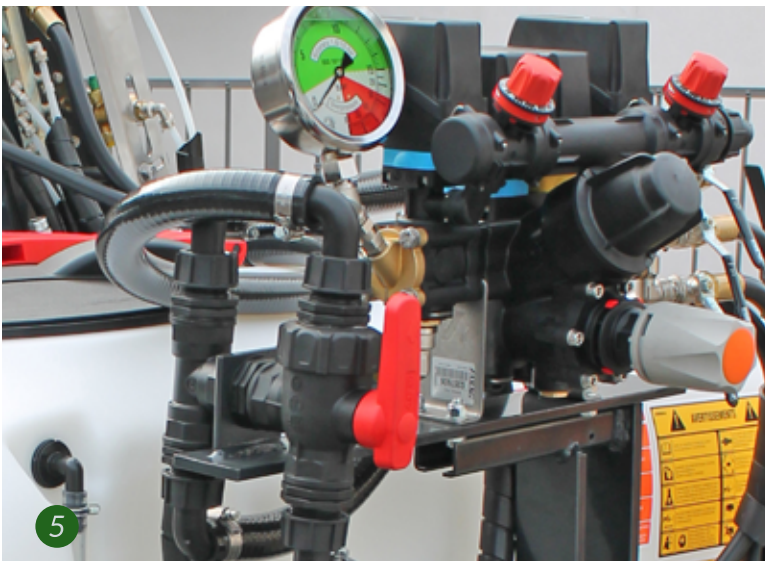



- Poly tank
- Jet agitation
- Painted frame
- Wash containers rinsing jet on basket filter
- Suction filter and 2 batch filters before nozzles
- Volumetric pump in anodized aluminum
- Albuz double nozzles albuz high low volume
- Fan with clutch
- Gearbox 2 speed and neutral
- Pto shaft



5. Flush valve system without returning to the tank
 6. Filters before the nozzles

	CAPACITY	FAN	LENGTH	WIDTH	HEIGHT	WEIGHT
	l	Ø mm	mm	mm	mm	kg
APUS 1-4 400	400	700	1340-1380	960-950	1480-1630	299
APUS 1-4 500	500	700	1520-1560	1230	1480-1630	309
APUS 1-4 600	600	700	1520-1560	1230	1480-1630	314
APUS 5 300	300	700	1200	955	1620	285
APUS 5 400	400	700	1200	955	1620	289
APUS 5 500	500	700	1370	1230	1620	299
APUS 5 600	600	700	1370	1230	1620	304
APUS 6 500	500	800	1460	1260	1630	334
APUS 6 600	600	800	1460	1260	1630	339
ZEN 300	300	640	1090	940	1480	285
ZEN 400	400	640	1090	940	1480	295
ARIEL 200	200	600	1000	890	1230	160
ARIEL 300	300	600	1000	890	1230	175

OPTIONAL

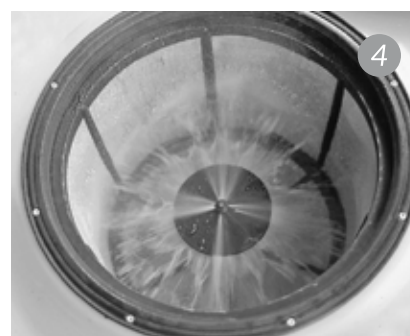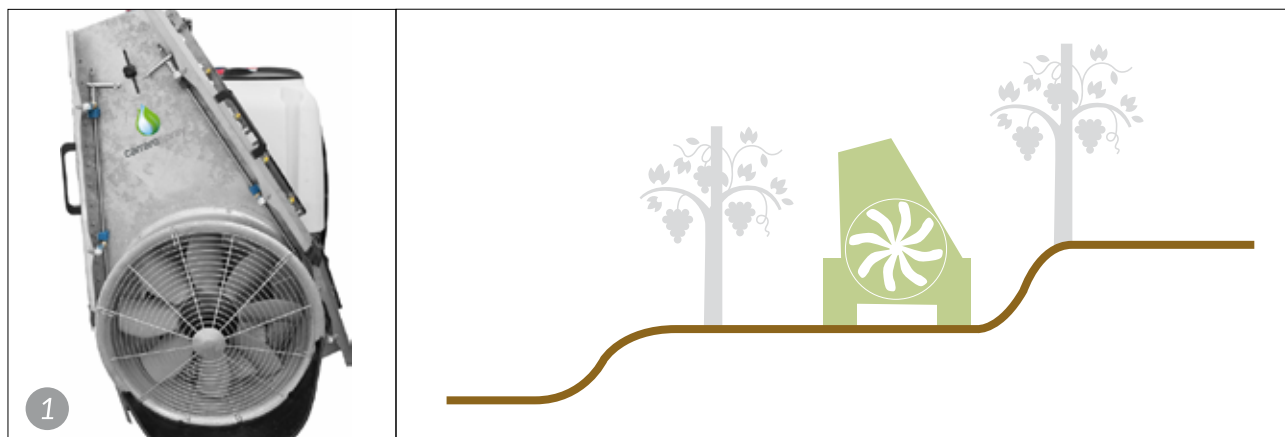

1. Hydraulic fifth wheel to correct the structure in slope (available for Apus 1-4-5)
2. Bulkheads for treatments in the vicinity of the buffer areas
3. Hose reel for spraygun
4. Mixer for powdered products